

Pako

SOP08121 - 4 W / 3000 K / CRI > 80

DESCRIPTION

Pako is a projector for wall mounting or ceiling mounting. It is made of matt white or matt black painted metal and is complete with a diffusing screen. The main body is characterized by the inclined cut on which the optical head can rotate 90°. Pako is complete with high efficiency LEDs and integrated driver, it is used for spotlight effects and is combined with the Stek pendant fixture series.




Switch

On+Off

PRODUCTS CHARACTERISTICS

installation type	Ceiling / Wall diffusers
material	Metal
Finish	Painted
Color	Black
Power	4 W
Lumen output - Full emission	320 lm
net weight	0,30 kg.

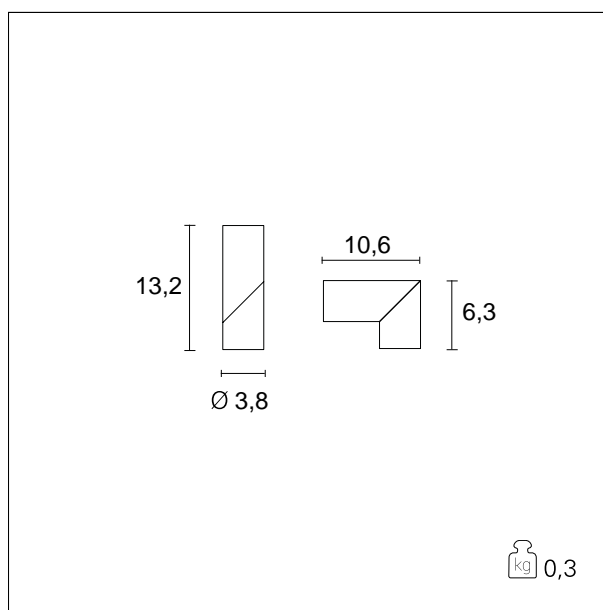

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On+Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Pako

SOP08121 - 4 W / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Light source connection	LED
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission	Direct
----------	---------------

PHOTOMETRIC

