

Stek

SOS11211 - 4,5 W - 410 lm / 3000 K / CRI > 80

DESCRIPTION

Stek is a pendant luminaire available in two different sizes: the body, in matt white or matt black painted aluminium, can be 60 or 80 cm long. The diffusing screen and the black cut-off allow perfect shielding of the integrated LED source, avoiding direct glare from all directions of observation. Stek is the ideal fixture for extremely defined spotlight effects. Equipped with an electronic driver integrated in the luminaire, it is complete with a transparent PVC suspension cable, maximum length 350 cm.

Switch


On:Off



PRODUCTS CHARACTERISTICS

installation type
material
Finish
Color
Power
Lumen output - Full emission
Dimensions
net weight

High Bays
Aluminum
Painted
White
4,5 W
410 lm
h. 80 cm.
0,70 kg.

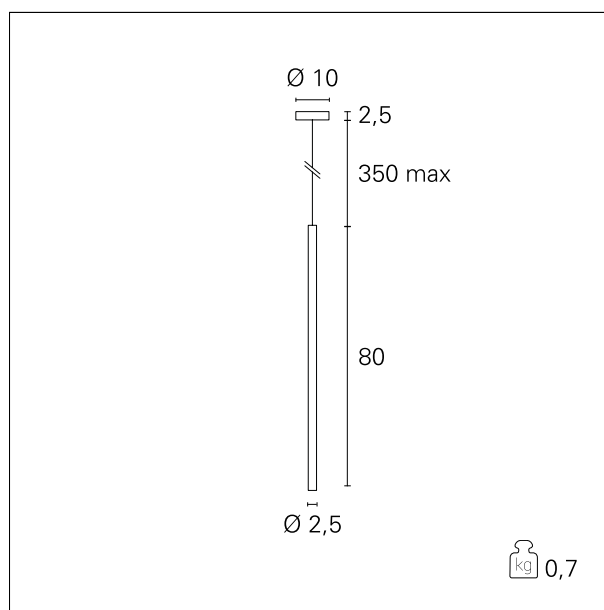

ELECTRICAL CHARACTERISTICS

feeding
driver
Insulation class

220÷240 V
On:Off
Class I

MECHANICAL CHARACTERISTICS

product IP rate

IP20

Stek

SOS11211 - 4,5 W - 410 lm / 3000 K / CRI > 80

LED SOURCE DETAILS

led source type	Power Led
Light temperature	3000 K
CRI	CRI > 80

DRIVER CHARACTERISTICS

driver	On+Off
--------	---------------

LIGHTING DETAILS

emission optic	Downlight 30°
----------------	--------------------------

PHOTOMETRIC

