

Light Line

STP20102 - PCB size 8 mm. - 4,8 W/m - 60 LED/m - Cut 100 mm. / 3000 K / CRI > 90


DESCRIPTION

Thanks to the latest generation LEDs, characterized by extremely high efficiency and very small dimensions, the Light Line series allows the user to obtain ideal light lines with high performances. With a compact and solid package and reinforced welding points provided by the latest generation assembly lines, Striped Light Line returns power, efficiency, high level color quality, reliability and perfect dissipation for highly professional use.



PRODUCTS CHARACTERISTICS

installation type	Stripled
Power	4,8 W/m
Lumen output - Full emission	450 lm/m
Efficacy	94 lm/W

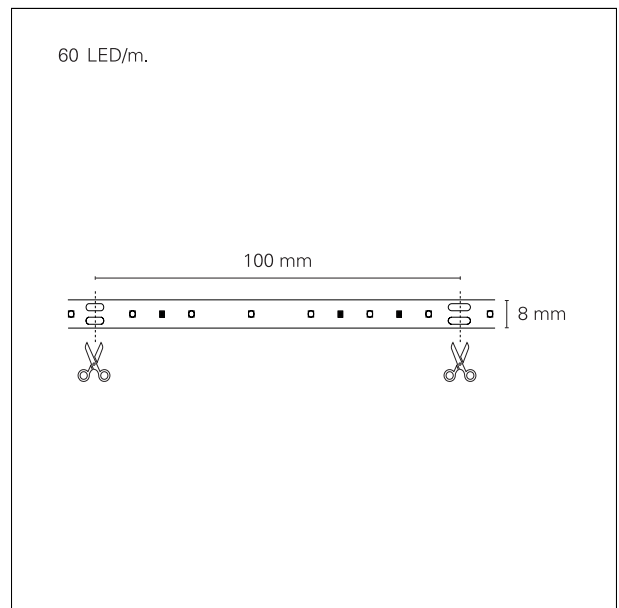

ELECTRICAL CHARACTERISTICS

feeding	24 V DC
Insulation class	Class III

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Light Line

STP20102 - PCB size 8 mm. - 4,8 W/m - 60 LED/m - Cut 100 mm. / 3000 K / CRI > 90

LED SOURCE DETAILS

led source type	SMD LED - 2216
Light temperature	3000 K
CRI	CRI > 90