

### Light Line

**STP20103** - PCB size 8 mm. - 4,8 W/m - 60 LED/m - Cut 100 mm. / 4000 K / CRI > 90


#### DESCRIPTION

Thanks to the latest generation LEDs, characterized by extremely high efficiency and very small dimensions, the Light Line series allows the user to obtain ideal light lines with high performances. With a compact and solid package and reinforced welding points provided by the latest generation assembly lines, Striped Light Line returns power, efficiency, high level color quality, reliability and perfect dissipation for highly professional use.



#### PRODUCTS CHARACTERISTICS

installation type	<b>Stripled</b>
Power	<b>4,8 W/m</b>
Lumen output - Full emission	<b>480 lm/m</b>
Efficacy	<b>100 lm/W</b>

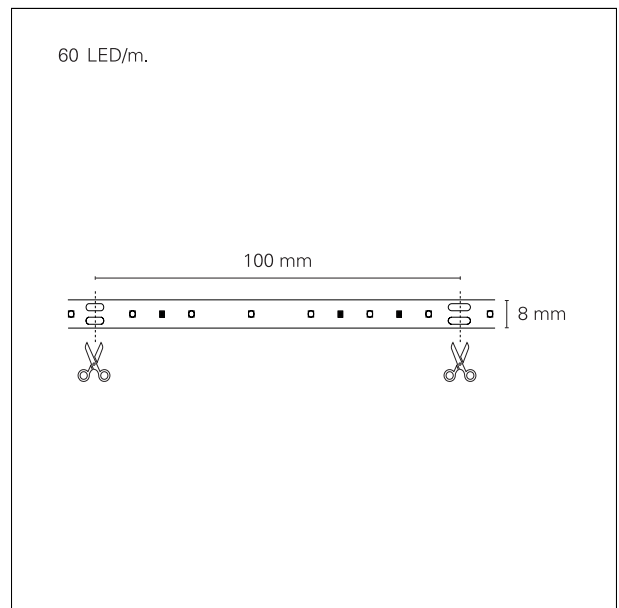

#### ELECTRICAL CHARACTERISTICS

feeding	<b>24 V DC</b>
Insulation class	<b>Class III</b>

#### MECHANICAL CHARACTERISTICS

product IP rate	<b>IP20</b>
-----------------	-------------

### Light Line

**STP20103** - PCB size 8 mm. - 4,8 W/m - 60 LED/m - Cut 100 mm. / 4000 K / CRI > 90

---

#### LED SOURCE DETAILS

---

led source type	<b>SMD LED - 2216</b>
Light temperature	<b>4000 K</b>
CRI	<b>CRI &gt; 90</b>