


CoB Line

STP30102 - PCB size 4 mm. - 8 W/m - / 8 W/m / 3000 K / CRI > 90


DESCRIPTION

The CoB Line stripled definitively solve the light dotting trouble which is perceivable in many traditional ministrips due to the proximity between the screen and the strip itself. The effect given by the CoB Lines is a continuous line of light, without any interruption. The 4 mm models are perfectly suitable with the aluminum profiles of the Micro series; this combination allows to create very thin lines of light, performing and without interruptions of light. The use is also particularly simplified for custom cutting. The indications on the PCB make easier the installation operations.



PRODUCTS CHARACTERISTICS

installation type	Stripled
Power	8 W/m
Lumen output - Full emission	680 lm/m
Efficacy	85 lm/W

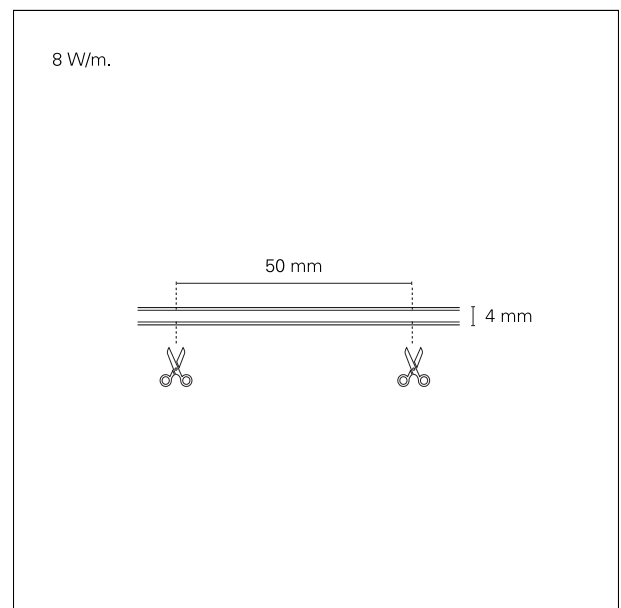

ELECTRICAL CHARACTERISTICS

feeding	24 V DC
Insulation class	Class III

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

CoB Line

STP30102 - PCB size 4 mm. - 8 W/m - / 8 W/m / 3000 K / CRI > 90

LED SOURCE DETAILS

led source type	CoB linear
Light temperature	3000 K
CRI	CRI > 90