

### CoB Line

**STP30153** - PCB size 8 mm. - 10 W/m - / 10 W/m / 4000 K / CRI > 90


#### DESCRIPTION

The CoB Line stripled definitively solve the light dotting trouble which is perceivable in many traditional ministrips due to the proximity between the screen and the strip itself. The effect given by the CoB Lines is a continuous line of light, without any interruption. The 4 mm models are perfectly suitable with the aluminum profiles of the Micro series; this combination allows to create very thin lines of light, performing and without interruptions of light. The use is also particularly simplified for custom cutting. The indications on the PCB make easier the installation operations.



#### PRODUCTS CHARACTERISTICS

|                              |                  |
|------------------------------|------------------|
| Power                        | <b>10 W/m</b>    |
| Lumen output - Full emission | <b>1092 lm/m</b> |
| Efficacy                     | <b>91 lm/W</b>   |

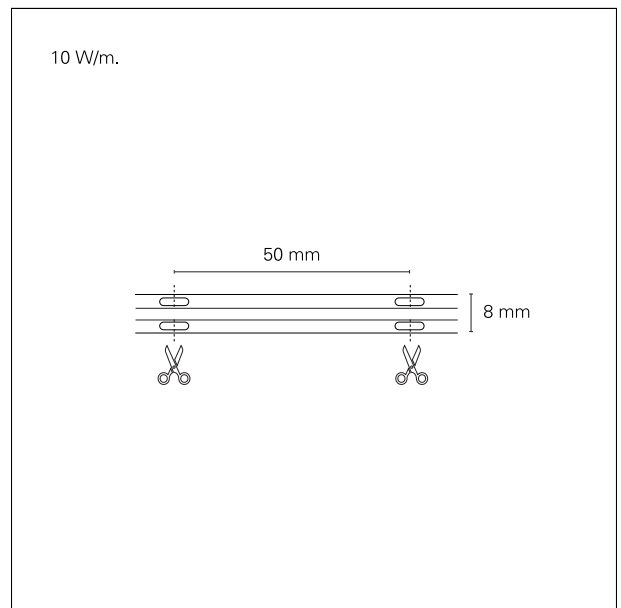

#### ELECTRICAL CHARACTERISTICS

|                  |                  |
|------------------|------------------|
| feeding          | <b>24 V DC</b>   |
| Insulation class | <b>Class III</b> |

#### MECHANICAL CHARACTERISTICS

|                 |             |
|-----------------|-------------|
| product IP rate | <b>IP20</b> |
|-----------------|-------------|

### CoB Line

**STP30153** - PCB size 8 mm. - 10 W/m - / 10 W/m / 4000 K / CRI > 90

---

#### LED SOURCE DETAILS

---

|                   |                    |
|-------------------|--------------------|
| led source type   | <b>CoB linear</b>  |
| Light temperature | <b>4000 K</b>      |
| CRI               | <b>CRI &gt; 90</b> |