

Day

TRK80503N - 28 W - 2700 lumen - 120° - Diffuser / 28 W / 4000 K / CRI > 80

DESCRIPTION

Day is the ideal solution for the lighting of shops and commercial areas with diffused light, replacing traditional linear fluorescent lamps. In accordance with Ska and Slim projectors and thanks to the included eurostandard adapters, it can be installed on the three-phase tracks series. Equipped with in-line LEDs, combined with a diffusing screen, to obtain a diffused lighting mitigating the shadow effect typical of the projectors light.




Switch

On+Off

PRODUCTS CHARACTERISTICS

installation type	Track / Ceiling projectors
material	Aluminum
Color	Black
Power	28 W
Lumen output - Full emission	2820 lm
Efficacy	93 lm/W
Dimensions	1090 x 52 mm.
net weight	0,73 kg.

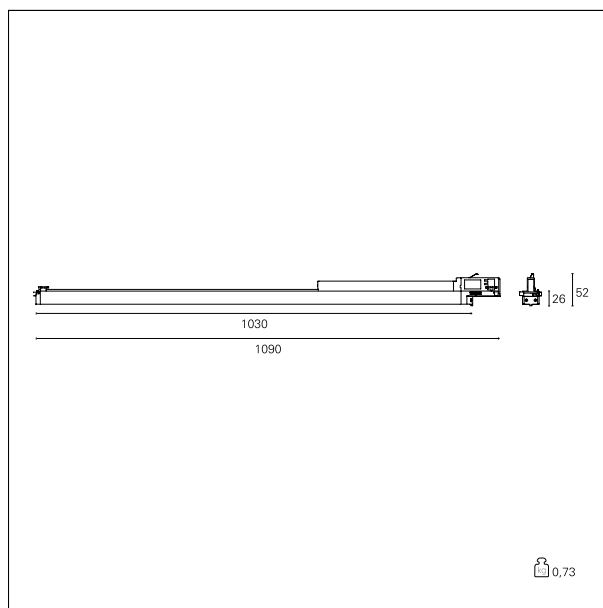

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	On+Off
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Day

TRK80503N - 28 W - 2700 lumen - 120° - Diffuser / 28 W / 4000 K / CRI > 80

LED SOURCE DETAILS

led source type	SMD Led
Photobiological risk	RG 0 Exempt (IEC 62471)
Light temperature	4000 K
CRI	CRI > 80
SDCM	\

DRIVER CHARACTERISTICS

driver	On÷Off
Operating temperature	-20°C ÷ 45°C

LIGHTING DETAILS

luminous effect	very wide
Beam angle - direct	120°

PHOTOMETRIC

