

Segno System Trimless

CTD32450PU - Module for trimless recessed mounting - downlight - single switch - 1131 mm. - 24 W - 3000 K / 3000 K / CRI > 92

DESCRIPTION

Segno Trimless is a system for continuous linear recessed lighting, which can be simply and fastly installed trimless. The ceiling finishing operations are completed before the electrical installation, which can be carried out in total cleanliness and without powder. The trimless recessed versions are made from structural modules that are installed on false ceiling frames thanks to the "Click & Lock" snap spring system.


Switch

Push



PRODUCTS CHARACTERISTICS

installation type	Linear light
material	Aluminum
Finish	Painted
Color	White
Power	24 W
Lumen output - Direct emission	4185 lm
Efficacy	174 lm/W
Dimensions	1131 mm.

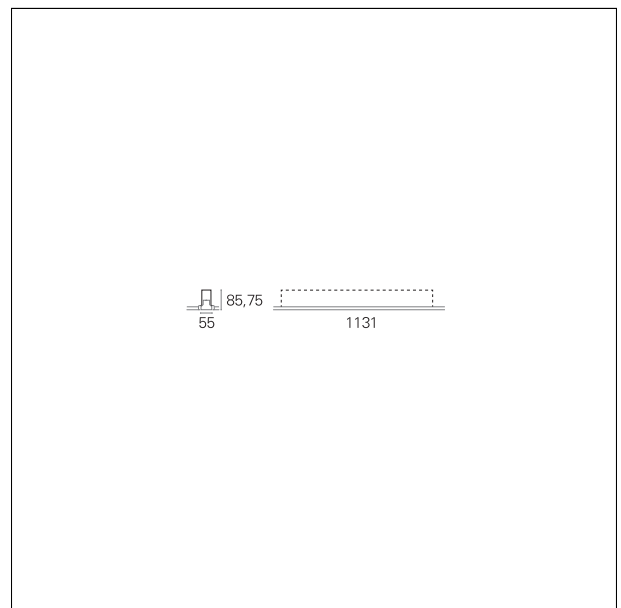

ELECTRICAL CHARACTERISTICS

feeding	220÷240 V
driver	Push
Insulation class	Class I

MECHANICAL CHARACTERISTICS

product IP rate	IP20
-----------------	-------------

Segno System Trimless

CTD32450PU - Module for trimless recessed mounting - downlight - single switch - 1131 mm. - 24 W - 3000 K / 3000 K / CRI > 92

LED SOURCE DETAILS

led source type	SMD Led
Photobiological risk	RG 1 Low risk (IEC 62471)
LED brand	TCI or equivalent
Service lifetime	L80 / B20 - 80.000 h.
Light temperature	3000 K
CRI	CRI > 92
SDCM	< 3

DRIVER CHARACTERISTICS

driver	Push
--------	-------------

LIGHTING DETAILS

emission	Downlight
Beam angle - direct	Asymmetric

PHOTOMETRIC

